

Life Time Graph

Of Z Power P4 White Series

Date : 08.07.16

By SSC R&D

Tj vs. Life Time Graph of Z-Power P4 1W Pure White

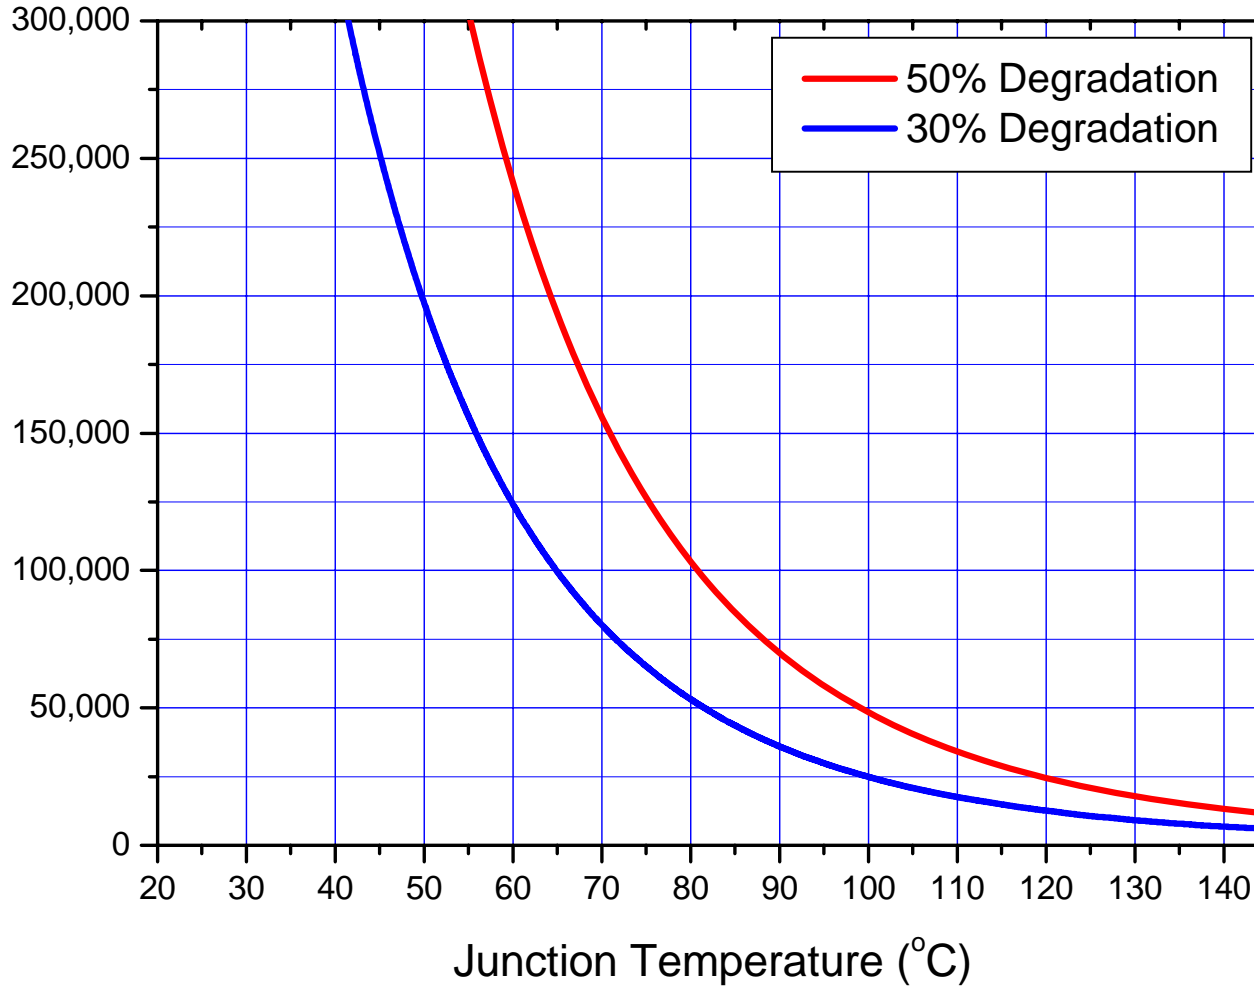

*This calculation can be done using the Arrhenius Model as shown below

$$R(t) = \exp(-\lambda t)$$

$$\lambda_2 = \lambda_1 \exp\left[\frac{E_A}{k} \left(\frac{1}{T_1} - \frac{1}{T_2}\right)\right]$$

where

$R(t)$ = Probability that unit will operate at time t

λ = failure rate

t = Time component is on

λ_1 = failure rate at junction temperature T_1


λ_2 = failure rate at junction temperature T_2

E_A = activation energy, in units eV

k = Boltzmann's constant ($8.617 \times 10^{-5} \text{ eV/K}$)

T = junction temperature in K ($\text{K} = \text{C} + 273$)

Tj vs. Life Time Graph of Z-Power P4 1W Warm White Series

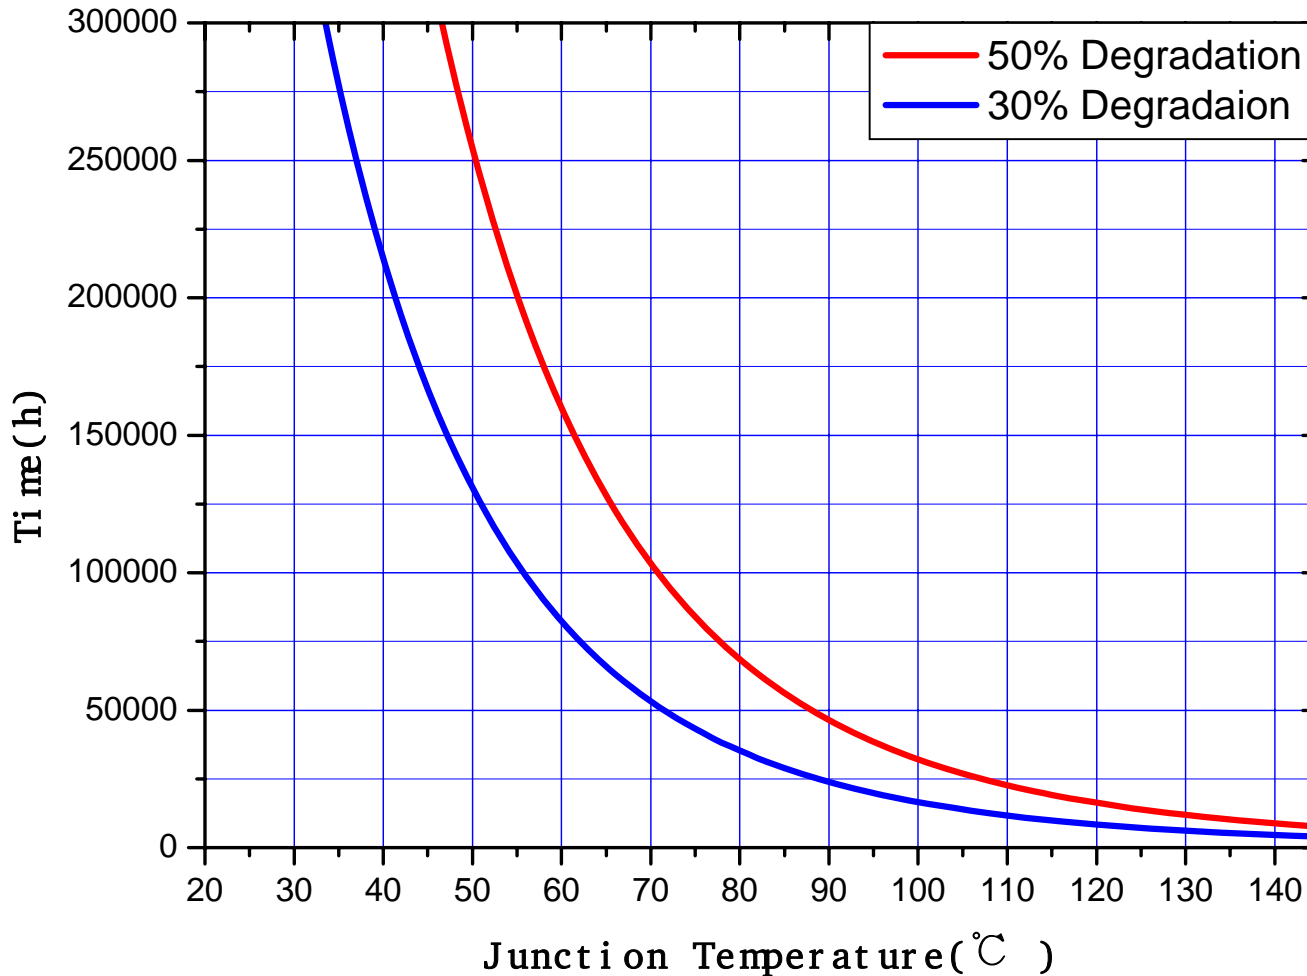

*This calculation can be done using the Arrhenius Model as shown below

$$R(t) = \exp(-\lambda t)$$

$$\lambda_2 = \lambda_1 \exp\left[\frac{E_A}{k} \left(\frac{1}{T_1} - \frac{1}{T_2}\right)\right]$$

where

$R(t)$ = Probability that unit will operate at time t

λ = failure rate

t = Time component is on

λ_1 = failure rate at junction temperature T_1


λ_2 = failure rate at junction temperature T_2

E_A = activation energy, in units eV

k = Boltzmann's constant ($8.617 \times 10^{-5} \text{ eV/K}$)

T = junction temperature in K ($\text{K} = \text{C} + 273$)

Tj vs. Life Time Graph of Z-Power P4 1W Natural White

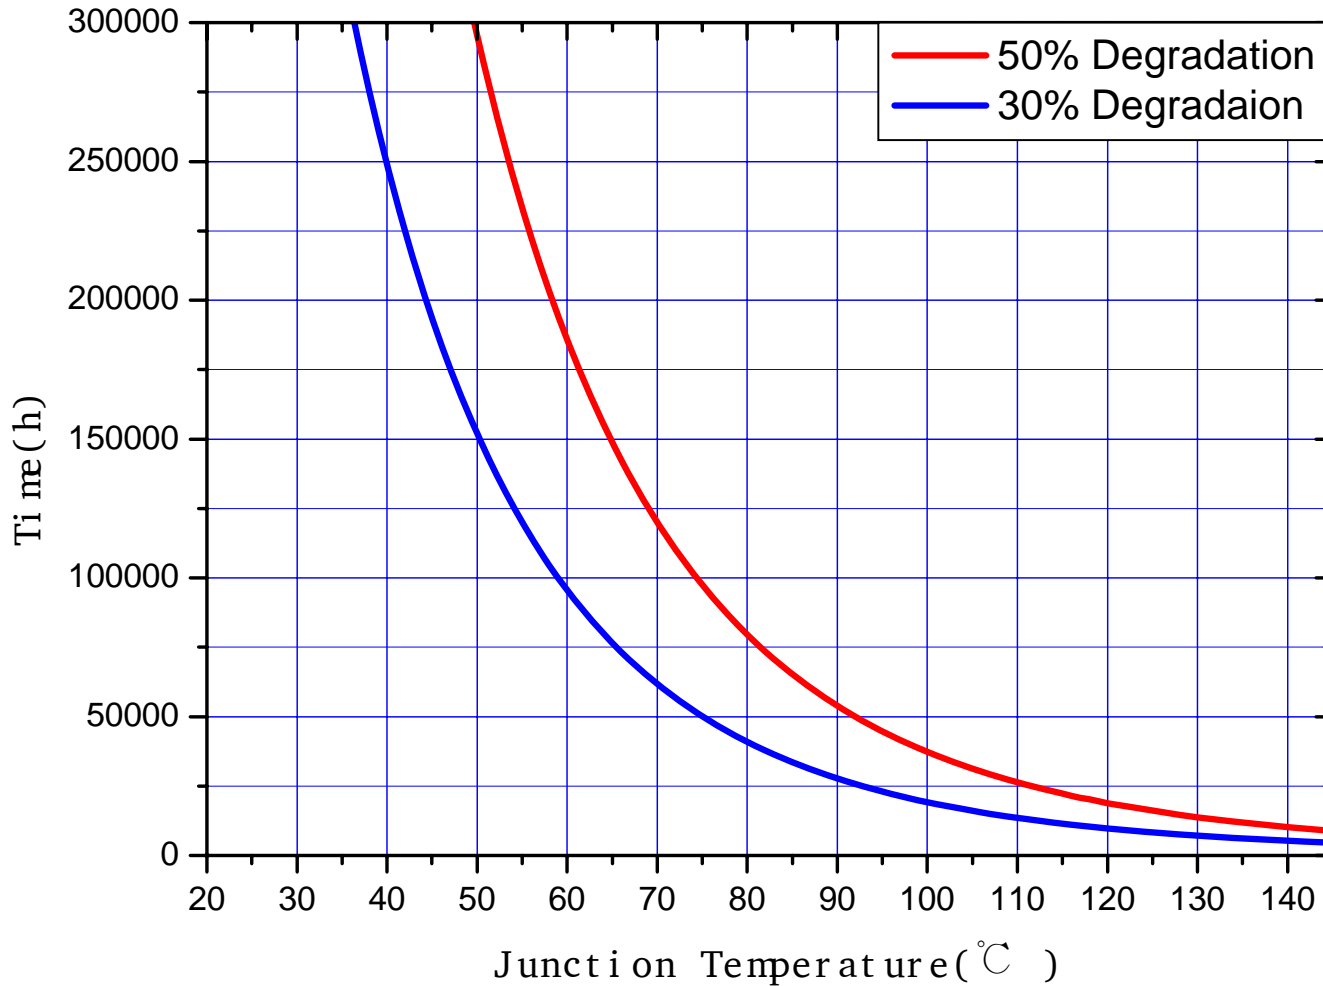

*This calculation can be done using the Arrhenius Model as shown below

$$R(t) = \exp(-\lambda t)$$

$$\lambda_2 = \lambda_1 \exp\left[\frac{E_A}{k} \left(\frac{1}{T_1} - \frac{1}{T_2}\right)\right]$$

where

$R(t)$ = Probability that unit will operate at time t

λ = failure rate

t = Time component is on

λ_1 = failure rate at junction temperature T_1

λ_2 = failure rate at junction temperature T_2

E_A = activation energy, in units eV

k = Boltzmann's constant ($8.617 \times 10^{-5} \text{ eV/K}$)

T = junction temperature in K ($\text{K} = \text{°C} + 273$)